



US007386893B2

(12) **United States Patent**
Chang

(10) **Patent No.:** **US 7,386,893 B2**
(45) **Date of Patent:** **Jun. 17, 2008**

(54) **LAMINATED SEWING-FREE CONCEALED ZIPPER CLOSURE FOR AN OUTWEAR HAVING ONE-PIECE-FABRIC-SLIT BODY AND METHOD OF MAKING SAME**

(75) Inventor: **Yung-Sheng Chang, Taipei (TW)**

(73) Assignee: **J. Adams & Associates Limited, Taipei (TW)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 496 days.

5,042,117	A *	8/1991	Tsubata	24/381
5,386,616	A *	2/1995	Norvell	24/389
5,444,898	A *	8/1995	Norvell	24/389
6,237,152	B1 *	5/2001	Goetrad	2/87
6,571,432	B1 *	6/2003	Rindle	24/432
6,651,254	B1 *	11/2003	Chang	2/87
6,668,384	B1 *	12/2003	Chang	2/96
6,675,390	B1 *	1/2004	Chang	2/96
6,691,326	B2 *	2/2004	Hexels	2/457
7,191,497	B2 *	3/2007	Butz	24/389
7,200,900	B2 *	4/2007	Berns	24/432
2004/0139528	A1 *	7/2004	Hord	2/96
2004/0237266	A1 *	12/2004	Wang	24/389
2005/0183247	A1 *	8/2005	Berns	24/432

(21) Appl. No.: **11/044,647**

(22) Filed: **Jan. 27, 2005**

(65) **Prior Publication Data**

US 2006/0162042 A1 Jul. 27, 2006

(51) **Int. Cl.**

A41D 3/02 (2006.01)

A44B 19/34 (2006.01)

(52) **U.S. Cl.** 2/96; 2/87; 24/432

(58) **Field of Classification Search** 2/2.17, 2/87, 96, 97, 100, 265, 234; 24/432, 389

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,148,269	A *	2/1939	Koch	2/74
3,335,425	A *	8/1967	Senser	2/96
3,449,764	A *	6/1969	De Fazio et al.	2/96
3,561,073	A *	2/1971	Rosser	24/432
3,883,381	A *	5/1975	Thaeler	156/66

* cited by examiner


Primary Examiner—Alissa L Hoey

(74) *Attorney, Agent, or Firm*—Ladas and Parry LLP

(57) **ABSTRACT**

Disclosed is an improved laminated concealed zipper closure for an outwear, comprising: an upper fabric formed with one slit dividing the upper fabric into a left panel and a right panel, each of the left and right panels having an edge facing the other; a first narrow fabric piece attached underneath the left panel; a second narrow fabric piece attached underneath the right panel; a zipper attached underneath the first narrow fabric piece and the second narrow fabric piece; a first transparent reinforcing member straddling over the edge of the left panel and the first narrow fabric piece; and a second transparent reinforcing member straddling over the edge of the right panel and the second narrow fabric piece. Further disclosed is a method of making such a laminated concealed zipper closure.

5 Claims, 3 Drawing Sheets

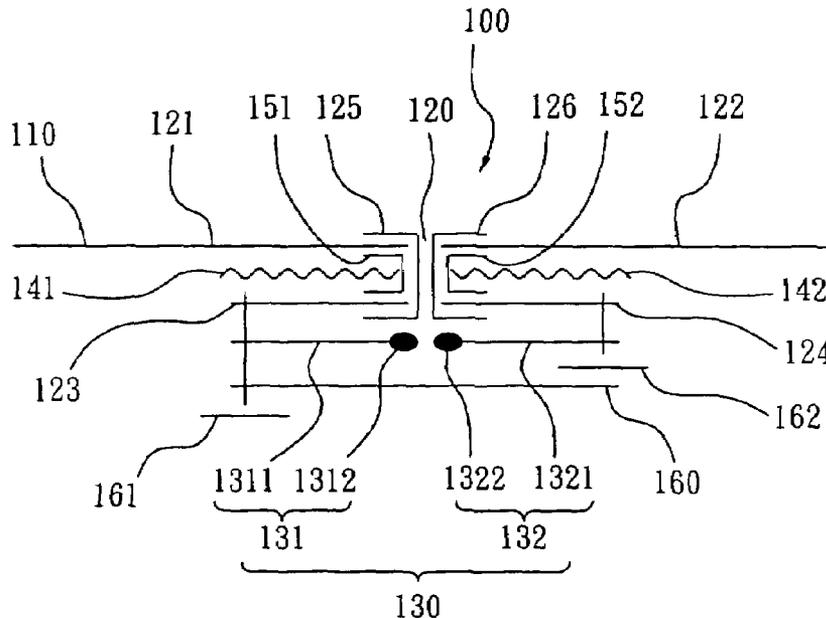

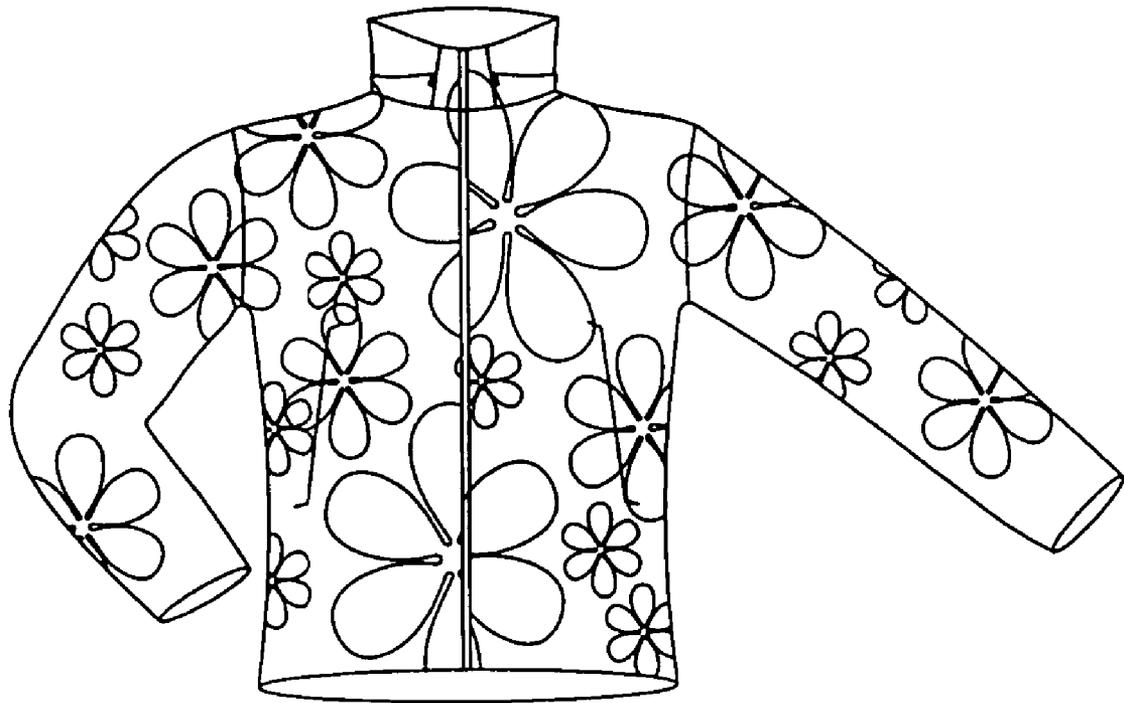


FIG. 1
(PRIOR ART)

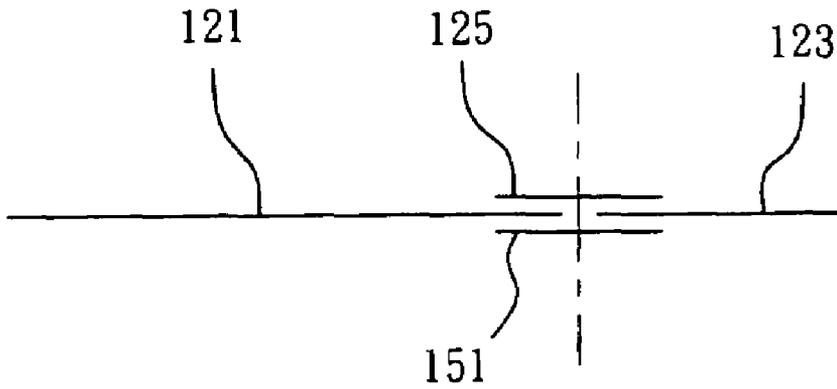


FIG. 3A

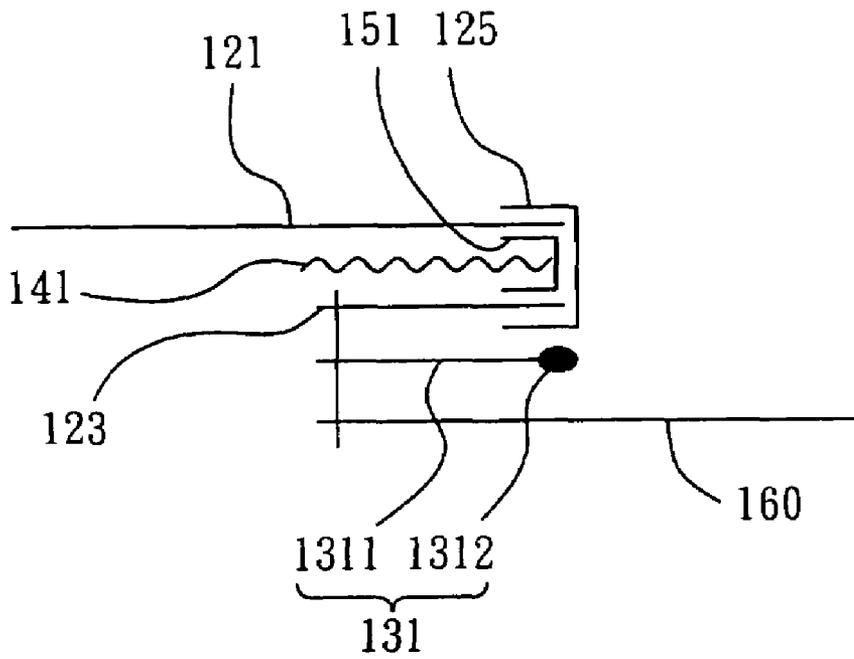


FIG. 3B

1

**LAMINATED SEWING-FREE CONCEALED
ZIPPER CLOSURE FOR AN OUTWEAR
HAVING ONE-PIECE-FABRIC-SLIT BODY
AND METHOD OF MAKING SAME**

CROSS-REFERENCES TO RELATED
APPLICATIONS

Not Applicable

STATEMENT REGARDING FEDERALLY
SPONSORED RESEARCH OR DEVELOPMENT

Not Applicable

DESCRIPTION

1. Technical Field

The invention relates to an improved laminated zipper, particularly to an improved laminated sewing-free concealed zipper closure for an outwear having one-piece-fabric-slit body and method of making same.

2. Description of the Related Art

FIG. 1 shows a schematic drawing of a printed outwear having a conventional zipper closure. For a traditional printed fabric for a jacket or a coat, if an open front or side pockets with zippers is required, the jacket's or the coat's front panel is always integrated with different part of the fabric or stitching which results in different segments.

In addition, for a conventional zipper closure, the zipper is stitched directly to the front panel of the printed fabric, where the sewing thread also becomes another slit on the front panel. It's likely the whole printed jacket or coat will become a chaotic scrap front panel sewn together.

To overcome the drawbacks of such a design, it is necessary to provide a one-piece-fabric-slit body front with sewing-free laminated concealed zipper closure to make a consistent look of an outwear without any significant segment when it is made of a printed fabric.

SUMMARY OF THE INVENTION

To overcome the drawbacks of the prior art, it is thus an object of the present invention to provide a one-piece-fabric-slit body front with sewing-free laminated concealed zipper closure to make a consistent look of an outwear without any significant segment when it is made of printed fabric.

It is another object of the present invention to provide an laminated concealed zipper closure with extra strength against abrasion, a water-resistant effect and different clothing aesthetic.

It is another objective of the present invention to provide a method for making such a laminated concealed zipper closure.

To achieve these objects, an laminated concealed zipper closure in accordance with the present invention comprises: an upper fabric formed with one slit dividing the upper fabric into a left panel and a right panel, each of the left and right panels having an edge facing the other; a first narrow fabric piece attached underneath the left panel; a second narrow fabric piece attached underneath the right panel; a zipper attached underneath the first narrow fabric piece and the second narrow fabric piece; a first transparent reinforcing member straddling over the edge of the left panel and the first narrow fabric piece; and a second transparent reinforcing member straddling over the edge of the right panel and the second narrow fabric piece.

2

Accordingly, the present invention further discloses a method of making a laminated concealed zipper closure, comprising the steps of: (a) providing an upper fabric; (b) cutting a slit through the upper fabric and dividing the upper fabric into a left panel and a right panel each having an edge facing the other; (c) placing two narrow fabric pieces adjacent to each of the edges with a small gap between the respective edge; (d) placing a transparent reinforcing member above each of the edges and the respective narrow fabric pieces; (e) bending the transparent reinforcing member such that the transparent reinforcing member straddles over the edge of each of the left and right panels along the length thereof and substantially parallel to the slit and each of the narrow fabric pieces is underneath the upper fabric; (f) placing a thermally meltable compound between each of the left and right panels and the respective narrow fabric piece along the length of the slit; (g) stitching a first zipper tape underneath one of the two narrow fabric pieces; (h) stitching a second zipper tape underneath the other of the two narrow fabric pieces; and (i) heat-pressing the upper fabric, the two narrow fabric pieces and the first and the second zipper tapes.

These and other modifications and advantages will become even more apparent from the following detailed description of a preferred embodiment of the invention and from the drawings in which:

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic drawing of a printed outwear having a conventional zipper closure;

FIG. 2 is a schematic drawing of a printed outwear having a laminated sewing-free concealed zipper closure according to the present invention;

FIG. 3A is a cross-sectional view showing steps of making a laminated concealed zipper closure;

FIG. 3B is a cross-sectional view showing steps of making a laminated concealed zipper closure; and

FIG. 3C is a cross-sectional view taken along lines 3C-3C of FIG. 2.

DETAILED DESCRIPTION OF THE
INVENTION

Referring FIG. 2, an improved laminated sewing-free concealed zipper closure **100** in accordance with the present invention is formed on a garment **50** of a printed fabric. The improved laminated zipper closure **100** includes an upper fabric **110**, which is a part of an outer-shell of the garment **50** or another piece of fabric to be sewn to the outer-shell of the garment **50**. The upper fabric **110** may be made of impregnated fabric (such as PU, PTFE, PVC, or rubber coated/laminated fabrics) or knit synthetic fabric (such as nylon, polyester, TC, CN). However, it should be noted that while applying the present invention to other types of garments, the fabric of the garment's shell can also be non-impregnated, especially highly breathable fabrics, which makes the garment fashionable with a neat outer appearance. Accordingly, the present invention may also be applied to a wide variety of fashions, but not limited to outdoor clothing.

As illustrated in FIG. 3C, the upper fabric **110** is formed with a slit **120**, preferably by a laser machine, stretched longitudinally and dividing the upper fabric **110** into a left panel **121** and a right panel **122**. Each of the left and right panels has an edge facing the other. A first narrow fabric piece **123** of about 1.5 cm wide is attached underneath the

left panel **121** along the length thereof while a second narrow fabric piece **124** of about 1.5 cm wide is attached underneath the right panel **122** along the length thereof.

A zipper **130**, preferably nylon or plastic with a about 3 cm width, is attached underneath the first narrow fabric piece **123** and the second narrow fabric piece **124**, and includes a first zipper tape **131**, a second zipper tape **132** and a slider (not shown in figure). Accordingly, the first zipper tape **131** has a tooth side **1312** and a fixing side **1311** stitched to the first narrow fabric piece **123** underneath the left panel **121**. The second zipper tape **132** has a tooth side **1322** and a fixing side **1321** stitched to the second narrow fabric piece **124** underneath the right panel **122**. The slider is disposed between the first and the second zipper tapes **131**, **132** to engage the tooth sides **1312**, **1322** of the first and the second zipper tapes **131**, **132**. A first transparent reinforcing member **125** straddles over the edge of the left panel **121** and the first narrow fabric piece **123**, while a second transparent reinforcing member **126** straddles over the edge of the right panel **122** and the second narrow fabric piece **124**.

To attach the first and the second narrow fabric piece **123**, **124** to the upper fabric **110**, a first thermally meltable compound **141** is inserted between the left panel **121** and the first narrow fabric piece **123** for attaching the first narrow fabric piece **123** to the left panel **121**, and a second thermally meltable compound **142** is inserted between the right panel **122** and the second narrow fabric piece **124** for attaching the second narrow fabric piece **124** to the right panel **122**. Each of the thermally meltable compound **141**, **142** may be a thermally meltable polyurethane resin in form of a glue film which would melt upon being heated by a thermal welding machine to result in adhesion effects.

The first and second transparent reinforcing members **125**, **126** may be made of polyurethane (PU) or PVC. Accordingly, each of the first and the second transparent reinforcing members **125**, **126** has a width of approximately 1 cm which binds the edge of each of the left and right panels **121**, **122** by approximately 0.50 cm and the respective first and second narrow fabric pieces **123**, **124** by approximately another 0.50 cm, such that each of the first and the second transparent reinforcing members **125**, **126** offers the respective edge extra strength against abrasion as well as does not interrupt the pattern of the printed fabric.

Additionally, the improved laminated concealed zipper closure **100** in accordance with the present invention can further comprise a first thin nylon glue coated fabric layer **151** disposed between the left panel **121** and the first narrow fabric piece **123** and straddling over the first thermally meltable compound **141**, and a second thin nylon glue coated fabric layer **152** disposed between the right panel **122** and the second narrow fabric piece **124** and straddling over the second thermally meltable compound **142** to offer extra strength. An inner flap **160**, usually made of PU shell backing brush material with a width of about 3 cm, can further be stitched underneath the first zipper tape **131**. Also a first thermal tape **161** of about 1.7 cm wide may be attached underneath spanning across the left panel **121** and the inner flap **160** and a second thermal tape **162** of about 1.7 cm wide may be attached underneath spanning across the second zipper tape **132** and the right panel **122** to clean finishing the zipper **130** and the inner flap **160**.

FIG. 3A illustrates initial steps of making such laminated concealed zipper closure in accordance with the present invention for the left panel **121**, while the steps for the right panel are identical which can be easily duplicated. After an upper fabric **110** is formed with a slit **120**, preferably by a laser machine, the upper fabric is divided into a left panel

121 and a right panel (not shown in figure) each having an edge facing the other. A first narrow fabric piece **123** of about 1.5 cm wide is placed adjacent to the edge of the left panel **121** with a small gap in between. Then a first transparent reinforcing member **125** of about 1 cm wide is placed above the edge of the left panel **121** for about 0.5 cm and the first narrow fabric piece **123** for about another 0.5 cm such that the first transparent reinforcing member **125** spans across the edge of the left panel **121** and the first narrow fabric piece **123**.

Referring to FIG. 3B, the first transparent reinforcing member **125** is now bent downwards such that the first transparent reinforcing member **125** straddles over the edge of the left panel **121** and the first narrow fabric piece **123** along the length of the slit and is substantially parallel to the slit (not shown in figure), and the first narrow fabric piece **123** is now located underneath the upper fabric **110**. A first thermally meltable compound **141** is then placed between the left panel **121** and the first narrow fabric piece **123** along the length of the slit. A first zipper tape **131** is stitched underneath the first narrow fabric piece **123** and the upper fabric is now heat-pressed to form a laminated concealed zipper closure **100**, as shown in FIG. 3C.

Additionally, as shown in FIG. 3A, a first thin nylon glue coated fabric layer **151** of about 1 cm wide may be further placed underneath spanning across the left panel **121** and the first narrow fabric piece **123** such that when the first transparent reinforcing member **125** is bent, the first thin nylon glue coated fabric layer **151** is bent and folded between the left panel **121** and the first narrow fabric piece **123**, which in turn, the thermally meltable compound **141** can now be inserted into the folded first thin nylon glue coated fabric layer **151** instead (referring to FIG. 3B). An inner flap **160** of about 3 cm wide may be further stitched underneath the first zipper tape **131** before placing the thermally meltable compound **141** underneath the left right panel **121** or before inserting the thermally meltable compound **141** into the folded first thin nylon glue coated fabric layer **151** to offer extra strength. A first thermal tape **161** of about 1.7 cm wide is then attached underneath spanning across the left panel **121** and the inner flap **160** while a second thermal tape **162** of about 1.7 cm wide is attached underneath spanning across the second zipper tape **132** (referring to FIG. 3C) to clean finishing the zipper **130** and the inner flap **160** to offer waterproof function.

From the above, it can be seen that the present invention provides a front panel consisting of only one piece of fabric and so the whole pattern of the printing can be consistent from one side to the other side. Incorporated in conjunction with the contemporarily filed application, entitled "Improved Laminated Pocket Zipper with Zipper-Lip, Method of Making Same and Storage Cab Thereof pending Zip-Lip pocket," the garment **50** can now be presented by a non-interrupted clean, all sew-free body front with no stitching interruption and two side pockets, and a complete pattern of a printing/picture/drawing or whatever artwork can be put right on the front panel.

The structure of the present invention is not limited to the above embodiments. Although the invention has been described with reference to the preferred embodiments, it will be obvious to persons skilled in the art that various changes and modifications may be made without departing from the scope of the invention as recited in the claims.

What is claimed is:

1. A method of making a laminated concealed zipper closure for an outwear, comprising the steps of:
 - a. providing an upper fabric;

5

- b. cutting a slit through the upper fabric and dividing the upper fabric into a left panel and a right panel each having an edge facing the other;
 - c. placing two narrow fabrics pieces adjacent to each of the edges with a small gap between the respective edge;
 - d. placing a transparent reinforcing member above each of the edges and the respective narrow fabrics pieces;
 - e. bending the transparent reinforcing member such that the transparent reinforcing member straddles over the edge of each of the left and right panels along the length thereof and substantially parallel to the slit, and over each of the narrow fabric pieces underneath the upper fabric;
 - f. placing a thermally meltable compound between each of the left and right panels and the respective narrow fabric piece along the length of the slit;
 - g. stitching a first zipper tape underneath one of the two narrow fabric pieces;
 - h. stitching a second zipper tape underneath the other of the two narrow fabric pieces; and
 - i. heat-pressing the upper fabric, the two narrow fabric piece and the first and the second zipper tapes.
2. The method of claim 1, further comprising a step of placing a thin nylon glue coated fabric layer underneath each

6

of the left and the right panels and the respective narrow fabric pieces such that when each of the transparent reinforcing members is bent, each of the thin nylon glue coated fabric layers is bent and folded between the left or the right panel and the respective narrow fabric piece and the thermally meltable compound can be inserted into each of the folded thin nylon glue coated fabric layers.

3. The method of claim 1, further comprising a step of stitching an inner flap underneath the first zipper tape before placing the thermally meltable compound underneath each of the left and right panels.

4. The method of claim 3, further comprising a step of attaching a thermal tape underneath the left panel and the inner flap and the other thermal tape underneath the second zipper tape and the right panel after heat-pressing the upper fabric, the two narrow fabric piece and the first and the second zipper tapes.

5. The method of claim 1, wherein the slit is cut by a laser machine.

* * * * *